


PRODUCT

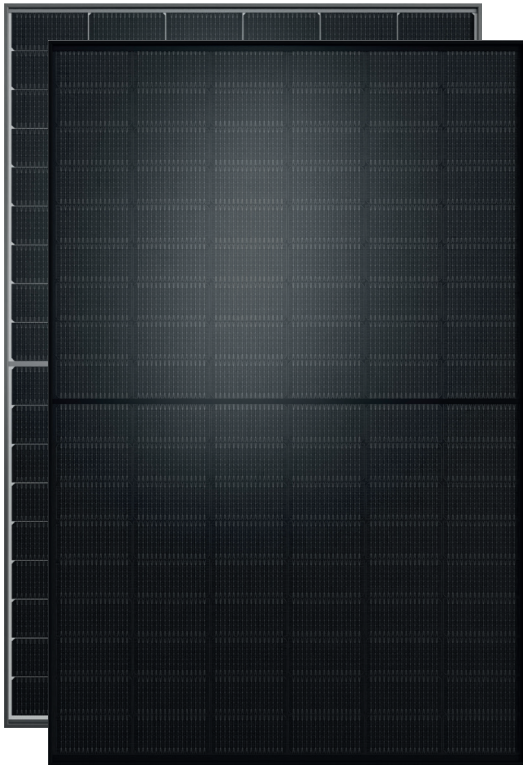

SOLARWATT Panel

classic M 3.0 pure
classic M 3.0 black

Glass-Foil-Module

Best price-performance ratio

With the classic models, Solarwatt offers affordable, robust, high-performance solar modules of proven quality. They are durable and high-yielding as well as resistant to weather effects and environmental influences.

The classic-modules are produced on state-of-the-art production lines and meet the high Solarwatt quality standards. They will therefore generate solar power well beyond their warranty period.

The modules come with a solid 20-year product guarantee.



SUSTAINABILITY



low CO₂ footprint

< 220 kg eq CO₂ / Modul*, 50% less CO₂ than standard modules and certified according to PPE2 criteria



fair production conditions

no forced or child labour, fair pay and regular audits by independent audits by independent experts



high recycling rate in raw materials

aluminum: 75 %, cell silicium: 45 %
sustainable use through long durability and recycling at the end of the product life cycle

* Specification without frame, with frame: < 240 kg eq CO₂/module

PRODUCT QUALITY

- performance: 440 Wp to 450 Wp
- bifacial TOPCon half-cut-cells
- LeTID tested and PID protected
- ammonia resistant
- salt mist resistant

SERVICE

simple returns policy

as per „Delivery terms for Solarwatt solar modules“


20 year product warranty

as per „Warranty conditions for SOLARWATT Panel classic“

25 year performance warranty

on 89,4 % of nominal power as per „Warranty conditions for SOLARWATT Panel classic“

DIMENSIONS

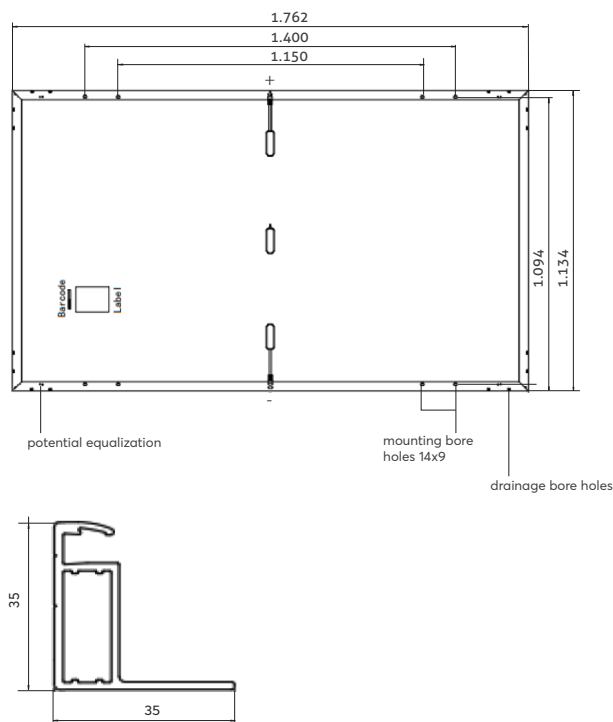

GENERAL DATA

| | |
|---|--|
| Module technology | Glass-foil laminate; aluminum frame black (black) or silver (pure) |
| Covering material | Tempered solar glass with anti-reflective finish, 3.2 mm |
| Encapsulation | Solar cells in POE encapsulation |
| Backing material | Multi-layer composite film, black (black) or white (pure) |
| Solar cells | 108 monocrystalline high power TOPCon solar cells |
| Cell dimensions | 182 x 93 mm |
| L x W x H / Weight | 1,762 ^{±2} x 1,134 ^{±2} x 35 ^{±0.3} mm / appr. 20.9 kg |
| Connection technology | Cables 2x 1.2 m / 4 mm ² , Sunter PV-ZH202B or MC4-type connectors |
| Bypass diodes | 3 |
| Max. system voltage | 1,000 V |
| IP rating | IP68 |
| Protection class | II (acc. to IEC 61140) |
| Fire class | C (acc. to IEC 61730) |
| Certified mechanical ratings as per IEC 61215 | in preparation: Pressure load up to 3,600 Pa (test load 5,400 Pa) Suction load up to 2,400 Pa (test load 3,600 Pa) |
| Recommended stress load as per Installation Instructions | Please refer to the specifications in the Installation Instructions and Warranty Conditions. |
| Qualifications | in preparation: IEC 61215 (incl. LeTID) IEC 61730 PID IEC TS 62804 IEC 61701 IEC 62716 MCS 005 |

ELECTRICAL DATA (STC)

STC (Standard Test Conditions): Irradiation intensity 1,000 W/m², spectral distribution AM 1.5 | Temperature 25 ± 2 °C, in accordance to EN 60904-3

Please check specific power class availability with your Solarwatt sales team

| | | | |
|---|--------------------|--------------------|--------------------|
| Nominal power P_{max} | 440 W _p | 445 W _p | 450 W _p |
| Nominal voltage V_{mp} | 32.8 V | 33.0 V | 33.2 V |
| Nominal current I_{mp} | 13.4 A | 13.5 A | 13.5 A |
| Open circuit voltage V_{oc} | 39.4 V | 39.6 V | 39.8 V |
| Short circuit current I_{sc} | 13.9 A | 14.0 A | 14.0 A |
| Module efficiency | 22.0 % | 22.3 % | 22.5 % |

Measurement tolerances: P_{max} ± 5 %; V_{oc} ± 3 %; I_{sc} ± 3 %, I_{mp} ± 10 %

Reverse-current power rating I_r: 25 A, operating modules with an external power source is only permissible if using a phase fuse with a tripping current of ≤ 25 A.

THERMAL FEATURES

| | |
|--|----------------|
| Operating temperature range | -40 ... +85 °C |
| Ambient temperature range | -40 ... +45 °C |
| Temperature coefficient P_{max} | -0.29 %/K |
| Temperature coefficient V_{oc} | -0.25 %/K |
| Temperature coefficient I_{sc} | 0.05 %/K |
| NMOT | 45 °C |

ELECTRICAL DATA (NMOT AND WEAK LIGHT)

NMOT (Nominal Module Operating Temperature): Irradiation intensity 800 W/m², spectral distribution AM 1.5, Temperature 20 °C
Weak light conditions: Irradiation intensity 200 W/m², Temperature 25 °C, Wind speed 1 m/s, load operation

| | | | |
|--|--------|--------|--------|
| Nominal power P_{max} | 440 W | 445 W | 450 W |
| Nominal power P_{max}@NMOT | 350 W | 352 W | 354 W |
| Nominal power P_{max}@200 W/m² | 86.2 W | 87.1 W | 88.3 W |

Measurement tolerances: P_{max} ± 5 %; V_{oc} ± 3 %; I_{sc} ± 3 %, I_{mp} ± 10 %

Reduction of module efficiency when irradiance is reduced from 1,000 W/m² to 200 W/m² (at 25 °C): 4 ± 2 % (relative) / -0.6 ± 0.3 % (absolute).

TRANSPORT AND PACKAGING

| | |
|---|-----------------------|
| Modules per pallet | 31 |
| Pallets per container | 26 |
| Stacked pallets/pallets per truck | 14/28 |
| Gross weight per pallet | 688 kg |
| Gross weight per stacked pallet (max. 2) | 1,376 kg |
| Pallet dimensions (packing size) | 1,800 x 1,140 x 1,250 |